



**ADVANCED
General Certificate of Education
2014**

Mathematics
Assessment Unit M4
assessing
Module M4: Mechanics 4
[AMM41]

MONDAY 23 JUNE, MORNING

**MARK
SCHEME**

Introduction

The mark scheme normally provides the most popular solution to each question. Other solutions given by candidates are evaluated and credit given as appropriate; these alternative methods are not usually illustrated in the published mark scheme.

The marks awarded for each question are shown in the right-hand column and they are prefixed by the letters **M**, **W** and **MW** as appropriate. The key to the mark scheme is given below:

M indicates marks for correct method.

W indicates marks for working.

MW indicates marks for combined method and working.

The solution to a question gains marks for correct method and marks for an accurate working based on this method. Where the method is not correct no marks can be given.

A later part of a question may require a candidate to use an answer obtained from an earlier part of the same question. A candidate who gets the wrong answer to the earlier part and goes on to the later part is naturally unaware that the wrong data is being used and is actually undertaking the solution of a parallel problem from the point at which the error occurred. If such a candidate continues to apply correct method, then the candidate's individual working must be followed through from the error. If no further errors are made, then the candidate is penalised only for the initial error. Solutions containing two or more working or transcription errors are treated in the same way. This process is usually referred to as "follow-through marking" and allows a candidate to gain credit for that part of a solution which follows a working or transcription error.

Positive marking:

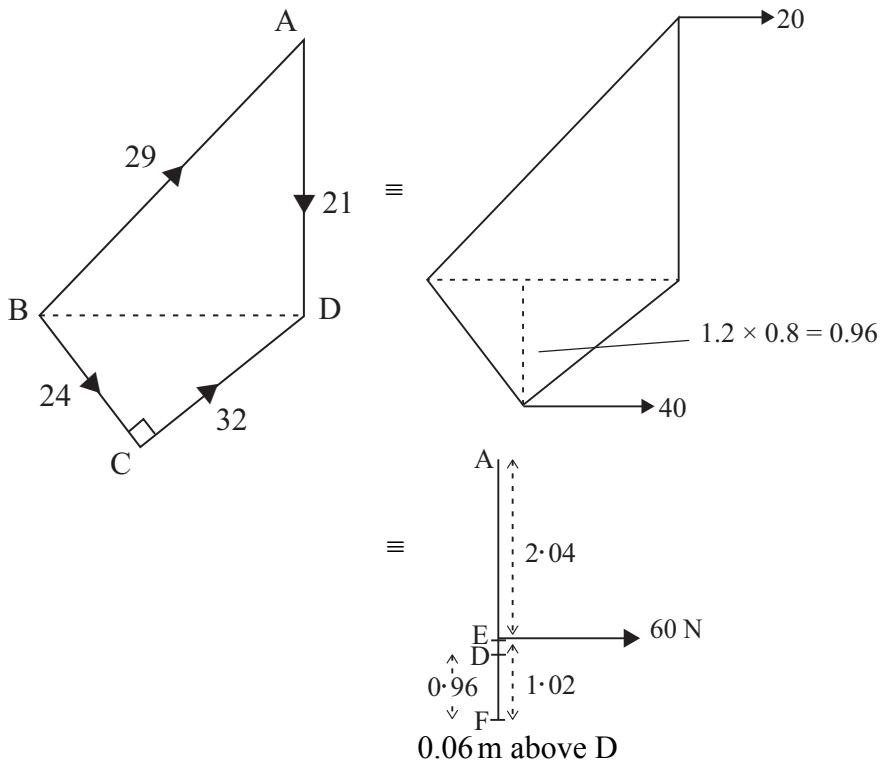
It is our intention to reward candidates for any demonstration of relevant knowledge, skills or understanding. For this reason we adopt a policy of **following through** their answers, that is, having penalised a candidate for an error, we mark the succeeding parts of the question using the candidate's value or answers and award marks accordingly.

Some common examples of this occur in the following cases:

- (a)** a numerical error in one entry in a table of values might lead to several answers being incorrect, but these might not be essentially separate errors;
- (b)** readings taken from candidates' inaccurate graphs may not agree with the answers expected but might be consistent with the graphs drawn.

When the candidate misreads a question in such a way as to make the question easier only a proportion of the marks will be available (based on the professional judgement of the examining team).

1 Separating the Pythagorean Triples and so combining the forces in pairs.



M1

AVAILABLE MARKS

MW1

MW1
MW1

M1
W1
W1
MW1

Alternative solution

Trig. values

MW1

$$\text{Res} \leftarrow 29 \times \frac{20}{29} + 24 \times \frac{3}{5} + 32 \times \frac{4}{5} = 60$$

M1 W1

$$\text{Res} \uparrow 29 \times \frac{21}{29} - 21 - 24 \times \frac{4}{5} + 32 \times \frac{3}{5} = 0$$

MW1

$$\begin{aligned} \text{Moments } \overleftrightarrow{B} & 60d = 21 \times 2.0 - 32 \times 1.2 \\ & = 3.6 \\ d & = 0.06 \end{aligned}$$

M1 MW1

Resultant 60 N, // BD $d = 0.06$

W1

MW1

8

2 (i) Perp from D to P is $\sqrt{3} l$

MW1

Moments \overleftrightarrow{D}

$$\begin{aligned} P \times \sqrt{3}l &= 1000 \times 2\sqrt{3}l \\ P &= 2000 \text{ N} \end{aligned}$$

M1

W1

(ii) BA must have a \uparrow component so tension

M1

BC must have a \leftarrow component as BA now has a \rightarrow component so a thrust

M1

(iii) at B resolving

$$\begin{aligned} \uparrow T_1 \sin 30^\circ &= 1000 \text{ N} \\ T_1 &= 2000 \text{ N} \\ \leftarrow T_1 \cos 30^\circ &= T_2 \\ T_2 &= 2000 \times \frac{\sqrt{3}}{2} \\ &= 1000\sqrt{3} \text{ N} \end{aligned}$$

M1

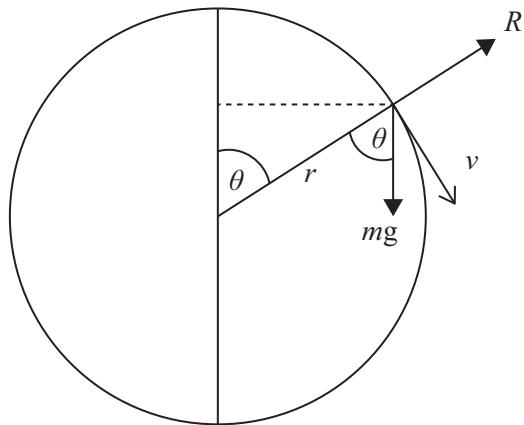
W1

MW1

(iv) at C Res \uparrow $T_3 = 0$ MW1
 at A Res \perp_R BA $T_4 \cos 30^\circ = T_3 \cos 30^\circ = 0$ MW1
 or $T_4 \cos 30^\circ + T_3 \cos 30^\circ = 0 \quad \therefore T_4 = 0$

10

3




(i) at P M1
 $\frac{1}{2} mv^2 + mgr(1 + \cos \theta) = 0 + 2 mgr$ MW2
 $KE = \frac{1}{2} mv^2 = mgr(1 - \cos \theta)$ W1

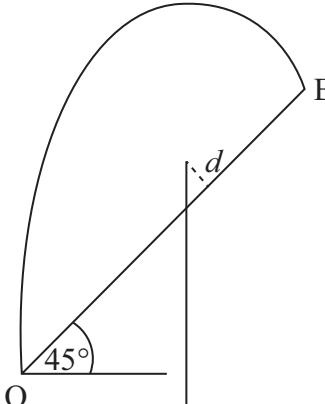
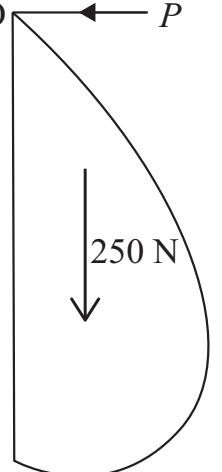
(ii) at P M1
 Res $\leftarrow \frac{mv^2}{r} = mg \cos \theta - R$ M1 W1
 $R = mg \cos \theta - 2mg(1 - \cos \theta)$ MW1
 $= mg(3 \cos \theta - 2)$ W1

(iii) $mg(3 \cos \theta_c - 2) = 0$ M1
 $\cos \theta_c = \frac{2}{3}$
 $\theta_c = \cos^{-1} \frac{2}{3}$
 $= 48.2^\circ$ W1

11

		AVAILABLE MARKS
4	(i) $\frac{GM\cancel{m}}{r^2} = \cancel{m}g \quad \therefore \quad G = \frac{gr^2}{M}$	MW1
	$[G] = [LT^{-2}][L]^2[M]^{-1}$	M1
	$= [M]^{-1}[L]^3[T]^{-2}$	W1
(ii)	$[T] = [M]^x[L]^y[M^{-1}L^3T^{-2}]^z$	M1
	$= [M]^{x-z}[L]^{y+3z}[T]^{-2z}$	W1
	$\therefore [M] \quad x-z=0$	M1
	$[L] \quad y+3z=0$	
	$[T] \quad -2z=1$	
	$\therefore z = -\frac{1}{2} = x \quad y = -3z = \frac{3}{2}$	W2
(iii)	 $\frac{GMm_1}{d^2} = m_1 d\omega^2$ $\omega^2 = \frac{GM}{d^3}$ $T = \frac{2\pi}{\omega}$ $= 2\pi \sqrt{\frac{d^3}{GM}}$ $= 2\pi M^{-\frac{1}{2}} d^{\frac{3}{2}} G^{-\frac{1}{2}}$ $\therefore k = 2\pi$	M1 W1 W1 M1 W1 W1
		13

			AVAILABLE MARKS
5	(i)		
		Cons mom. $\cancel{mv_2} + \cancel{kmv_1} = km\cancel{u}$	M1 W1
		Newton's law $v_2 - v_1 = (-e)(-u) = eu$	M1 W1
		$(1+k)v_1 = (k-e)u$	
		$v_1 = \frac{(k-e)u}{1+k}$	W1
		$v_2 = v_1 + eu$	
		$= \frac{(k-e)u}{(1+k)} + \frac{(1+k)eu}{(1+k)}$	
		$= \frac{(1+e)ku}{(1+k)}$	W1
	(ii)	$v_3 \leftarrow = ev_2 = \frac{e(1+e)ku}{(1+k)}$	MW1
		If $k > e$ $v_1 \rightarrow v_3 \leftarrow$	M1
		∴ a collision	
	(iii)	If $k < e$, then for another collision we need	M1
		$\frac{e(1+e)ku}{1+k} > \frac{(e-k)u}{1+k}$	W1
	i.e.	$e^2k + ek - e + k > 0$ $ke^2 - (1-k)e + k > 0$	W1
			11

		AVAILABLE MARKS
6 (i)	$y_1 - y_2$ is the strip length and is needed to find the mass. $\frac{1}{2}(y_1 + y_2)$ is the distance the strip's c.o.m. is from OX and needed to calculate its moment about OX	M1 M1
(ii)	$I_2 = \int_0^2 px(2x - x^2)dx = \int_0^2 p(2x^2 - x^3)dx$ $= p\left[\frac{2x^3}{3} - \frac{x^4}{4}\right]_0^2$ $= p\left(\frac{16}{3} - \frac{16}{4}\right) = \frac{16p}{12} = \frac{4p}{3}$ $I_1 = \frac{4p}{3} \quad \therefore \quad \bar{x} = \frac{I_2}{I_1} = 1$	MW1 MW1 MW1 MW1
(iii)	$\bar{y} = \frac{I_3}{I_1} = \frac{28p}{15} \times \frac{3}{4p}$ $= 1.4$	MW1
(iv)		$d = (1.4 - 1) \cos 45^\circ = 0.4 \times \frac{1}{\sqrt{2}} = 0.2\sqrt{2}$ M1W1
(v)		M1 MW1 W1
		12

7 (i) Resolving vertically

AVAILABLE MARKS

$$mg = (E + F) \sin \alpha + (N + P) \cos \alpha \quad \text{M1 W1}$$

Resolving horizontally

$$\frac{mv^2}{r} = (E + F) \cos \alpha - (N + P) \sin \alpha \quad \text{M2 W1}$$

$$E + F = \mu(N + P) \quad \text{MW1}$$

$$\frac{mv^2}{r} = \frac{\mu \cos \alpha - \sin \alpha}{\mu \sin \alpha + \cos \alpha} \quad \text{MW1}$$

$$= \frac{\mu - \tan \alpha}{\mu \tan \alpha + 1}$$

$$\therefore v^2 = rg \left(\frac{\mu - \tan \alpha}{\mu \tan \alpha + 1} \right) \quad \text{W1}$$

(ii) $v^2 = 98 \left(\frac{\frac{6}{7} - \frac{1}{4}}{\frac{6}{7} \times \frac{1}{4} + 1} \right)$ MW1

$$v^2 = 49$$

$$v = 7 \quad \text{W1} \quad 10$$

Total **75**