

OXFORD CAMBRIDGE AND RSA EXAMINATIONS

Friday 27 May 2022 – Afternoon

GCSE (9–1) Computer Science

J277/02 Computational thinking, algorithms and programming

**Time allowed: 1 hour 30 minutes
plus your additional time allowance**

**DO NOT USE:
a calculator**

Please write clearly in black ink.

Centre number

--	--	--	--	--

Candidate number

--	--	--	--

First name(s) _____

Last name _____

READ INSTRUCTIONS OVERLEAF



INSTRUCTIONS

Use black ink.

Write your answer to each question in the space provided. If you need extra space use the lined pages at the end of this booklet. The question numbers must be clearly shown.

Answer ALL the questions.

INFORMATION

The total mark for this paper is 80.

The marks for each question are shown in brackets [].

ADVICE

Read each question carefully before you start your answer.

BLANK PAGE

Answer ALL the questions.

SECTION A

- 1 (a) Tick (✓) ONE box in each row to identify whether the OCR Reference Language code given is an example of selection or iteration. [4]

OCR Reference Language code	Selection	Iteration
<pre>for i = 1 to 10 print(i) next i</pre>		
<pre>while score != 0 playgame() endwhile</pre>		
<pre>if playerHit() then score = 0 endif</pre>		
<pre>switch bonus: case 0: score = 9 case 1: score = 7 case 2: score = 5 endswitch</pre>		

- (b) Write pseudocode to increment the value held in the variable `score` by one.

_____ [1]

(c) State the name of each of the following computational thinking techniques.

Breaking a complex problem down into smaller problems.

Hiding or removing irrelevant details from a problem to reduce the complexity.

[2]

- 2 A fast food restaurant offers half-price meals if the customer is a student or has a discount card. The offer is not valid on Saturdays.


A computer system is used to identify whether the customer can have a half-price meal.

The table identifies the three inputs to the computer system:

Input	Value
A	Is a student
B	Has a discount card
C	The current day is Saturday

(a) The logic system $P = (A \text{ OR } B) \text{ AND NOT } C$ is used.

- (i) Complete the following logic diagram for $P = (A \text{ OR } B) \text{ AND NOT } C$ by drawing one logic gate in each box. [3]

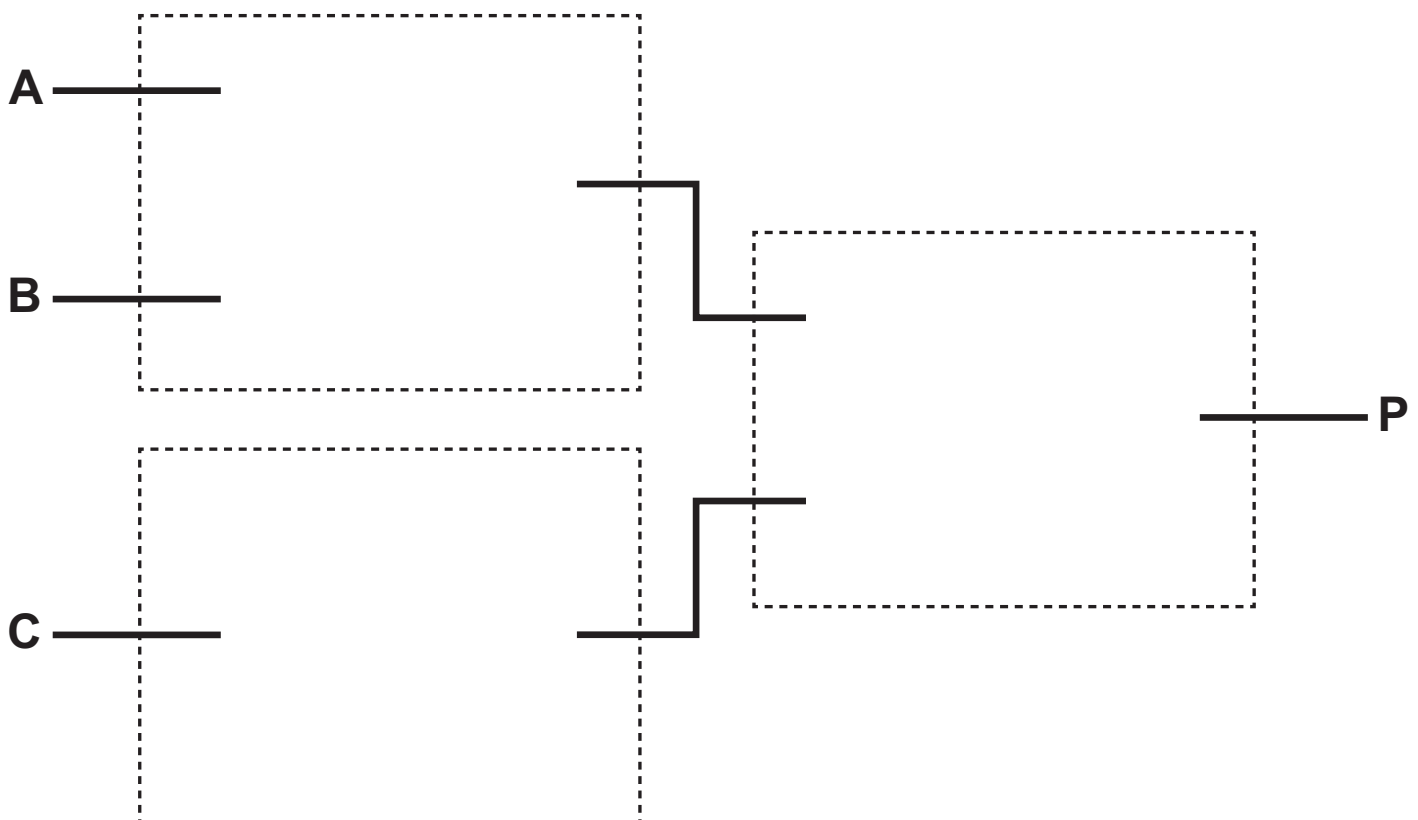

- (ii) A truth table can be produced for this logic circuit.

Describe the purpose of a truth table.

[2]

- (iii) State how many rows (excluding any headings) would be required in a truth table for the logic expression:

$P = (A \text{ OR } B) \text{ AND NOT } C$

[1]

- (b) The restaurant needs an algorithm designing to help employees work out if a customer can have a half price meal or not. It should:**

input required data

decide if the customer is entitled to a discount

output the result of the calculation.


Design the algorithm using a flowchart. Use the space opposite. [5]

- (c) The restaurant adds a service charge to the cost of a meal depending on the number of people at a table. If there are more than five people 5% is added to the total cost of each meal.**

Customers can also choose to leave a tip, this is optional and the customer can choose between a percentage of the cost, or a set amount.

Identify ALL the additional inputs that will be required for this change to the algorithm.

[2]



- (d) Each member of staff that works in the restaurant is given a Staff ID. This is calculated using the following algorithm.

```
01  surname = input("Enter surname")
02  year = input("Enter starting year")
03  staffID = surname + str(year)
04  while staffID.length < 10
05      staffID = staffID + "x"
06  endwhile
07  print("ID " + staffID)
```

- (i) Define the term **CASTING AND** give the line number where casting has been used in the algorithm.

Definition _____

Line number _____

[2]

- (ii) Complete the following trace table for the given algorithm when the surname “Kofi” and the year 2021 are entered.

You may not need to use all rows in the table. [4]

Line number	surname	year	staffID	Output
01	Kofi			
02		2021		

- 3 A program stores the following list of positive and negative numbers. The numbers need sorting into ascending order using a merge sort.**

45	12	−99	100	−13	0	17	−27
-----------	-----------	------------	------------	------------	----------	-----------	------------

- (a) The first step is to divide the list into individual lists of one number each. This has been done for you.**

Complete the merge sort of the data by showing each step of the process. [3]

45	12	−99	100	−13	0	17	−27
-----------	-----------	------------	------------	------------	----------	-----------	------------

- (b) Once the numbers are in order, a binary search can be run on the data.

Describe the steps a binary search will follow to look for a number in a sorted list.

[4]

(c) A linear search could be used instead of a binary search.

Describe the steps a linear search would follow when searching for a number that is NOT in the given list.

[2]

BLANK PAGE

- 4 Jack is writing a program to add up some numbers. His first attempt at the program is shown.

```
a = input("Enter a number")
b = input("Enter a number")
c = input("Enter a number")
d = input("Enter a number")
e = input("Enter a number")
f = (a + b + c + d + e)
print(f)
```

- (a) Give TWO ways that the maintainability of this program could be improved.

1 _____

2 _____

[2]

(b) Jack's program uses the addition (+) arithmetic operator. This adds together two numbers.

(i) State the purpose of each of the arithmetic operators in the table. [2]

Arithmetic operator	Purpose
*	
/	

- (ii) Complete the description of programming languages and translators by writing the correct term from the box in each space. [5]

continues	crashes	debugging
error	executable	high-level
interpreter	language	low-level
many	no	one
stops	with	without

Jack writes his program in a _____ language.

This needs to be translated into assembly or machine code before it can be executed. This is done using a translator.

One type of translator is an interpreter.

This converts one line of code and then executes it, before moving to the next line. It _____ when an error is found, and when corrected continues running from the same position. This translator is helpful when debugging code.

A second type of translator is a compiler.

This converts all of the code and produces an error report. The code will not run until there are _____ errors. The _____ file produced can be run _____ the compiler.

- (c) Jack decides to improve his program. He wants to be able to input how many numbers to add together each time the algorithm runs, and also wants it to calculate and display the average of these numbers.

Write an algorithm to:

ask the user to input the quantity of numbers they want to enter and read this value as input

repeatedly take a number as input, until the quantity of numbers the user input has been entered

calculate and output the total of these numbers

calculate and output the average of these numbers.

[6]

[illegible]

SECTION B

We advise you to spend at least 40 minutes plus your additional time allowance on this section.

Some questions require you to respond using either the OCR Exam Reference Language or a high-level programming language you have studied. These are clearly shown.

- 5 Customers at a hotel can stay between 1 and 5 (inclusive) nights and can choose between a basic room or a premium room.

(a) A typical booking record is shown in the table:

<code>firstName</code>	Amaya
<code>surname</code>	Taylor-Ling
<code>nights</code>	3
<code>room</code>	Premium
<code>stayComplete</code>	False

- (i) State the most appropriate data type for the following fields:

Nights _____

Room _____ [2]

- (ii) Give the name of ONE field that could be stored as a Boolean data type.

_____ [1]

- (iii) Booking records are stored in a database table called TblBookings.

The following SQL statement is written to display all customer bookings that stay more than one night.

```
SELECT ALL  
FROM TblBookings  
IF Nights < 1
```

The SQL statement is incorrect.

Rewrite the SQL statement so that it is correct.

[4]

(b) When a new booking is recorded, the details are entered into a program to validate the values. The following criteria are checked:

**firstName and surname are not empty
room is either “basic” or “premium”
nights is between 1 and 5 (inclusive).**

If any invalid data is found “NOT ALLOWED” is displayed.

If all data is valid “ALLOWED” is displayed.

- (i) Complete the following program to validate the inputs.

**You must use EITHER:
OCR Exam Reference Language, OR
a high-level programming language that you
have studied.**

```
firstName = input("Enter a first  
name")
```

```
surname = input("Enter a surname")
```

```
room = input("Enter basic or  
premium")
```

```
nights = input("Enter between 1 and  
5 nights")
```

```
stayComplete = False [5]
```

[illegible]

- (ii) Complete the following test plan to check whether the number of nights is validated correctly. [3]

Test data (number of nights)	Type of test	Expected output
2		ALLOWED
	Boundary	ALLOWED
	Erroneous / Invalid	NOT ALLOWED

- (ii) Write program code, that uses `newPrice()`, to output the price of staying in a Premium room for 5 nights.

You must use EITHER:
OCR Exam Reference Language, OR
a high-level programming language that you
have studied.

[3]

- (d) The hotel has nine rooms that are numbered from room 0 to room 8.

The number of people currently staying in each room is stored in an array with the identifier `room`.

The index of `room` represents the room number.

Array `room`

Index	0	1	2	3	4	5	6	7	8
Data	2	1	3	2	1	0	0	4	1

The following program counts how many people are currently staying in the hotel.

```
for count = 1 to 8
    total = 0
    total = total + room[count]
next count
print(total)
```

When tested, the program is found to contain **TWO** logic errors.

Describe how the program can be refined to remove these logic errors.

[2]

- (e) The hotel car park charges £4 per hour. If the car is electric, this price is halved to £2 per hour.

Write an algorithm to:

take as input the number of hours the user has parked and whether their car is electric or not

calculate and output the total price

repeat continually until the user enters 0 hours.

You must use EITHER:

OCR Exam Reference Language, OR

a high level programming language that you have studied. [6]

[illegible]

END OF QUESTION PAPER

ADDITIONAL ANSWER SPACE

If additional space is required, you should use the following lined page(s). The question number(s) must be clearly shown in the margin(s).



Copyright Information

OCR is committed to seeking permission to reproduce all third-party content that it uses in its assessment materials. OCR has attempted to identify and contact all copyright holders whose work is used in this paper. To avoid the issue of disclosure of answer-related information to candidates, all copyright acknowledgements are reproduced in the OCR Copyright Acknowledgements Booklet. This is produced for each series of examinations and is freely available to download from our public website (www.ocr.org.uk) after the live examination series.

If OCR has unwittingly failed to correctly acknowledge or clear any third-party content in this assessment material, OCR will be happy to correct its mistake at the earliest possible opportunity.

For queries or further information please contact The OCR Copyright Team, The Triangle Building, Shaftesbury Road, Cambridge CB2 8EA.

OCR is part of Cambridge University Press & Assessment, which is itself a department of the University of Cambridge.